



PRC-T / PRC-TS: LACQUER LEVEL MONITORING BOOSTS PRODUCTION RELIABILITY

Automatic monitoring detects low lacquer levels immediately and enables operators to replace or refill the bottle in good time, guaranteeing continuous production, free of unnecessary disruptions.


Detection sensors on PRC-T and PRC-TS outside seam lacquering systems permit hassle-free monitoring of the level in the lacquer bottle. When the level drops below the minimum fill level, a warning message appears on the operating panel prompting the operator to refill or replace the bottle. If the refill is not carried out within a specified time, a line stop is triggered.

ADVANTAGES

- Higher production reliability guaranteed
- Reliable fill level check for PRC-T and PRC-TS
- Straightforward operation

RETROFITTING

Electrical integration: UNICONTROL 3 systems can be retrofitted.

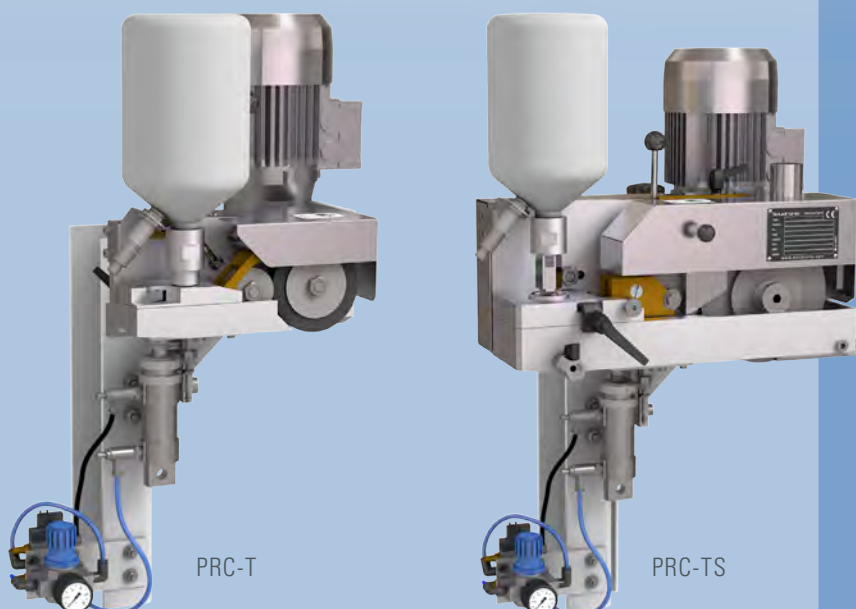

Technology that keeps you ahead

Soudronic AG Industriestrasse 35 CH-8962 Bergdietikon +41 44 743 66 66 info@soudronic.com www.soudronic.com

Soudronic